



Touring truss

Double hung pre-rig truss 26 x 30 spigoted


- › Double hung pre-rig truss 26 x 30 spigoted
- › Standard lengths are 66", 96" and 126"
- › Equipped with steel spigots
- › Main chords are 2" OD x 3/16" aluminum
- › Diagonals are 1" OD x 1/8" aluminum
- › Fabricated by AWS / SFL certified welders




Plan Views - Connector Orientation Specified by Customer

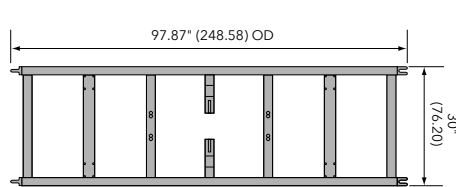


Plan

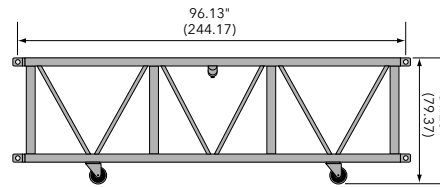


Elevation




End View




2-Way Corner Block




3-Way Corner Block



4-Way Corner Block



Center Pivot Horiz. Articulating Block



Horizontal Variable Corner

Loading chart

Span feet (meters)	Maximum allowable uniform loads			Maximum allowable point loads					
	Load lbs/ft	Load lbs (kgs)	Max Defl in.	center point	Max Defl. in.	third point	Max Defl. in.	quarter point	Load lbs (kgs)
8 (2.43)	1169	9352 (4242)	0.02	9353 (4243)	0.03	4676 (2121)	0.02	3118 (1414)	0.02
16 (4.87)	571	9136 (4144)	0.14	9136 (4144)	0.22	4568 (2072)	0.19	3045 (1381)	0.17
24 (7.31)	371	8904 (4039)	0.46	7668 (3478)	0.63	4460 (2023)	0.62	2973 (1349)	0.58
32 (9.75)	271	8672 (3934)	1.08	4565 (2071)	0.92	3424 (1553)	1.16	2282 (1035)	1.08
40 (12.19)	185	7400 (3357)	1.84	4427 (2008)	1.76	2674 (1213)	1.81	1981 (899)	1.87
48 (14.63)	119	5712 (2591)	2.54	2863 (1299)	2.09	2147 (974)	2.60	1431 (649)	2.43
56 (17.06)	86	4816 (2185)	3.54	2755 (1250)	3.28	1771 (803)	3.54	1271 (577)	3.55

Spigots Only

Note: Deflections reported in the tables on the left are the maximum expected for full loadings (indoor only). All loads are based on 10' (3.05 m) sections. Other section lengths are available. Load tables are reprinted from engineering reports developed by Parkhill, Smith & Cooper, Inc., Structural Engineers, and apply to truss fabricated after December 1989.

Double hung pre-rig truss 26 x 30 spigoted Connections are steel spigots & 3/4" clevis pins

Product Description	Item Code	Weight lbs (kgs)
66" PRTTRUSS (EMPTY)	TC 2630-066S	117 (53)
96" PRTTRUSS (EMPTY)	TC 2630-096S	134 (61)
126" PRTTRUSS (EMPTY)	TC 2630-126S	163 (74)
PRT 2-WAY CORNER BLOCK	TC 2630-C2S	83 (38)
PRT 3-WAY CORNER BLOCK	TC 2630-C3S	106 (48)
PRT 4-WAY CORNER BLOCK	TC 2630-C4S	130 (59)
PRT 2-WAY SLEEVE FOR 12" TOWER	TC 2630-S2S	114 (52)
PRT 3-WAY SLEEVE FOR 12" TOWER	TC 2630-S3S	137 (62)
PRT4-WAY SLEEVE FOR 12" TOWER	TC 2630-S4S	160 (73)
3/4" CLEVIS PIN	TC CP-75	0.4 (0.18)
MEDIUM R-CLIP	TC RC-MED	- (-)